

## Latiguillo color gris RJ45 Cat 6 UTP

### Características

Cable de red Cat 6 UTP

Colores disponibles del cable: amarillo, azul, blanco, rojo o verde


AWG 24

Alcanza frecuencias de hasta 250 MHz en cada par y una velocidad de 1 Gbps

Cumple certificado CE y ROHS

Embalaje, bolsa retail con auto-cierre, etiqueta con descripción y código de barras

### Dibujos técnicos

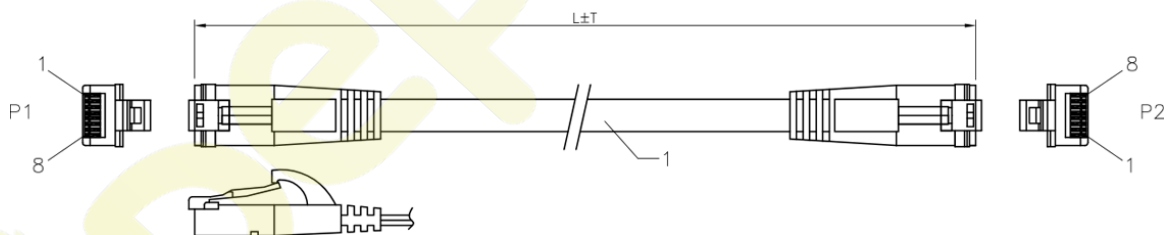


NO.	PART NO.	PART NAME	MATERIAL	Q'TY	REMARKS
3		MOLDING	PVC	2	VARIOUS
2		CONN.	RJ45	2	TRANSPARENCE
1		CABLE	(7/0.2CC+0.92PE)*4P+PVC, OD5.2	1	VARIOUS

Cable	
Conductor:	7/0.2 CCA
Insulation:	(HD-PE) $\varnothing 0.92 \pm 0.05$
Insulation color:	1. white orange/orange. 2. white green/green. 3. white blue/blue. 4. white brown/brown.
Jacket:	PVC
OD:	$5.2 \pm 0.15 \text{mm}$
Color	
RJ45 Connector	
1. T568B RJ45 UTP PLUG BP8C * 2pcs	
2. PVC Color	

PINOUT	
P1	P2
WHITE/ORANGE	1
ORANGE	2
WHITE/GREEN	3
GREEN	6
BLUE	4
WHITE/BLUE	5
WHITE/BROWN	7
BROWN	8

(T568B)

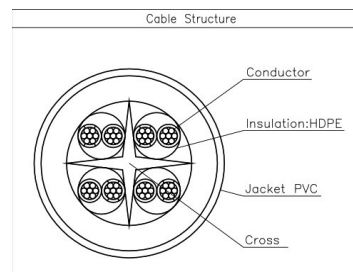

Las especificaciones e imágenes están sujetas a cambios sin previo aviso. Los nombres referidos y las marcas registradas son pertenecen a sus propietarios.

## Datos técnicos

Electrical Characteristics (20°C)		
Standard:	TIA/EIA-568-B-2&IEC/ISO11801	
Tests:	Units	Spec.
1. Conductor C. Resistance	$\Omega/100m$	<28.1
2. Imbalance of Pair D.C. Resistance	%	<2.5
3. Insulation Resistance	M $\Omega$ KM	>5000
4. Capacitance	nF/100m	<5.6
5. Imbalance of Capacitance	pF/100m	<330
6. Dielectric Strength between Pairs	Kv/min	<1.0
7. Characteristic impedance	$\Omega$	100 $\pm$ 15
8. Operating	-45°C ~ +65°C	

Frequency (MHZ)	PSNEXT (dB)	ELTEXT (dB/100m)	SELTEXT (dB/100m)	Transmit Speed
0.772	74	70	67	0.65C
1	72.5	67.8	64.8	
4	63.5	55.8	52.8	
8	58.8	49.7	46.7	
10	57.3	47.8	44.8	
16	54.2	43.7	40.7	
20	52.8	41.8	38.8	
25	51.3	39.8	36.8	
31.25	49.9	37.9	34.9	
62.5	45.4	31.9	28.9	
100	42.3	37.8	24.8	
200	37.8	21.8	18.8	
250	36.3	19.8	16.8	

Frequency (MHZ)	(ohm)	RL (dB)	ATTN (dB/100m)	NEXT (dB)
0.772	100 $\pm$ 10 $\Omega$	19.4	1.8	76
1		20.0	2.0	74.3
4		23.0	3.8	65.3
8		24.5	5.3	60.8
10		25.0	6	59.3
16		25.0	7.6	56.2
20		25.0	8.5	54.8
25		24.3	9.5	53.3
31.25		23.6	10.7	51.9
62.5		21.5	15.4	47.4
100		20.1	19.8	44.3
200		18	29	39.8
250		17.3	32.8	38.3

Referencia	Código EAN	Caja	Long.	Color
CAB-06002-YE	8436539914679	300	0,25 m	Amarillo
CAB-06005-YE	8436539913429	250	0,50 m	Amarillo
CAB-06010-YE	8436539914723	200	1,00 m	Amarillo
CAB-06015-YE	8436539914761	200	1,50 m	Amarillo
CAB-06020-YE	8436539914808	150	2,00 m	Amarillo
CAB-06030-YE	8436539914815	120	3,00 m	Amarillo
CAB-06002-BL	8436539914662	300	0,25 m	Azul
CAB-06005-BL	8436539914686	250	0,50 m	Azul
CAB-06010-BL	8436539914693	200	1,00 m	Azul
CAB-06015-BL	8436539914730	200	1,50 m	Azul
CAB-06020-BL	8436539914778	150	2,00 m	Azul
CAB-06030-BL	8436539914846	120	3,00 m	Azul
CAB-06002-WH	8436539916284	300	0,25 m	Blanco
CAB-06005-WH	8436539916291	250	0,50 m	Blanco
CAB-06010-WH	8436539916307	200	1,00 m	Blanco

Referencia	Código EAN	Caja	Long.	Color
CAB-06015-WH	8436539916314	200	1,50 m	Blanco
CAB-06020-WH	8436539916369	150	2,00 m	Blanco
CAB-06030-WH	8436539916499	120	3,00 m	Blanco
CAB-06002-RE	8436539914648	300	0,25 m	Rojo
CAB-06005-RE	8436539913412	250	0,50 m	Rojo
CAB-06010-RE	8436539914716	200	1,00 m	Rojo
CAB-06015-RE	8436539914754	200	1,50 m	Rojo
CAB-06020-RE	8436539914792	150	2,00 m	Rojo
CAB-06030-RE	8436539914822	120	3,00 m	Rojo
CAB-06002-GR	8436539914655	300	0,25 m	Verde
CAB-06005-GR	8436539913405	250	0,50 m	Verde
CAB-06010-GR	8436539914709	200	1,00 m	Verde
CAB-06015-GR	8436539914747	200	1,50 m	Verde
CAB-06020-GR	8436539914785	150	2,00 m	Verde
CAB-06030-GR	8436539914839	120	3,00 m	Verde



Made in China.



Las especificaciones e imágenes están sujetas a cambios sin previo aviso. Los nombres referidos y las marcas registradas son pertenecen a sus propietarios.