



Patch panel 12 puertos Cat.6 UTP

Características

Patch Panel 12 puertos Cat 6 UTP RJ45

Es adecuado para gabinete estándar de 10"



El bloque de conexión admite AWG22-26

Compatible con Cat 5e FTP

Contactos chapado en oro de 50 micro pulgadas

Material: PC / PPO

Dibujos técnicos

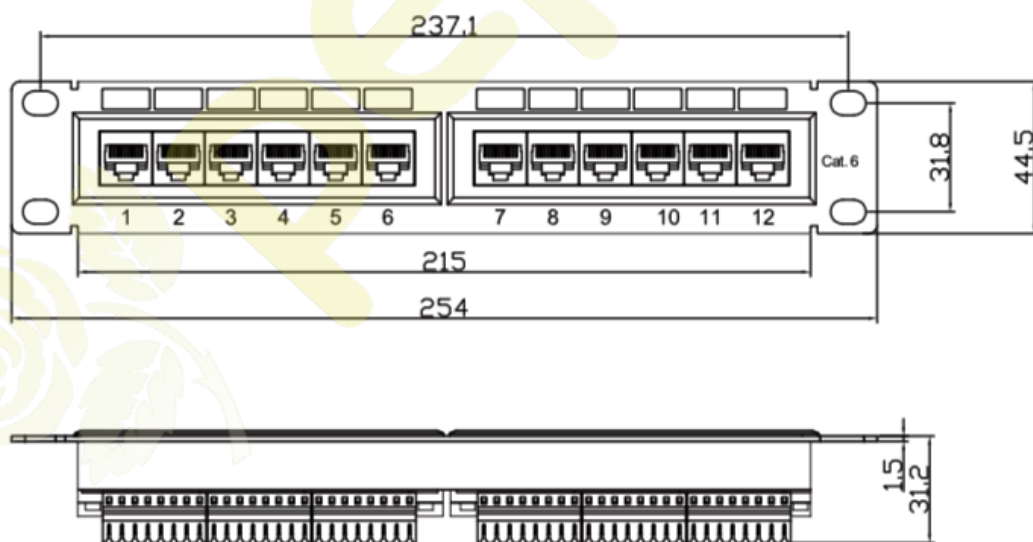

Datos técnicos

Specification:

Material:

1. Panel: 1.5mm/SPCC with Black color painting. 2. RJ45 Housing: PBT,
3. RJ45 Contact material & finished:
 - 3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 3-2. Contact area: Min. 3 micro-inch Gold plated.
4. IDC House: PC,
5. IDC Terminal material & finished:
 - 5-1. Phosphor Bronze with 50 micro-inch Tin-Lead plated. over 50-60 micro-inch Nickel plated.
 - 5-2. 110 & Krone tool compatible.
 - 5-3. Use for 23-24AWG stranded and solid wire.
6. Jack Bracket Set: ABS, Black color.

Performance:

- a. The IDC color combine two wirings of T568A & T568B.
- b. Insertion Force: 900 grms for 8 contacts.
- c. Retention Strength: 7.7 kgs between Jack and Plug.
- d. Operation Temperature: -40°C to 70°C
- e. Durability:
 - e-1. Jack: 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 - e-2. IDC: Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

Referencia	Código EAN	Dimensiones
PAT-06012-ST	8436539919766	254 x 44,5 x 31,2 mm

