



Armario rack 19" tipo cabina

Características

Armario rack tipo cabina de 19" para entornos IT

Incluye ruedas y pies de ajuste

Puerta frontal de vidrio templado


Puerta trasera metálica

Puertas laterales de apertura

Capacidad de carga estática de hasta 800 kg

Se suministra desmontado

Dibujos técnicos

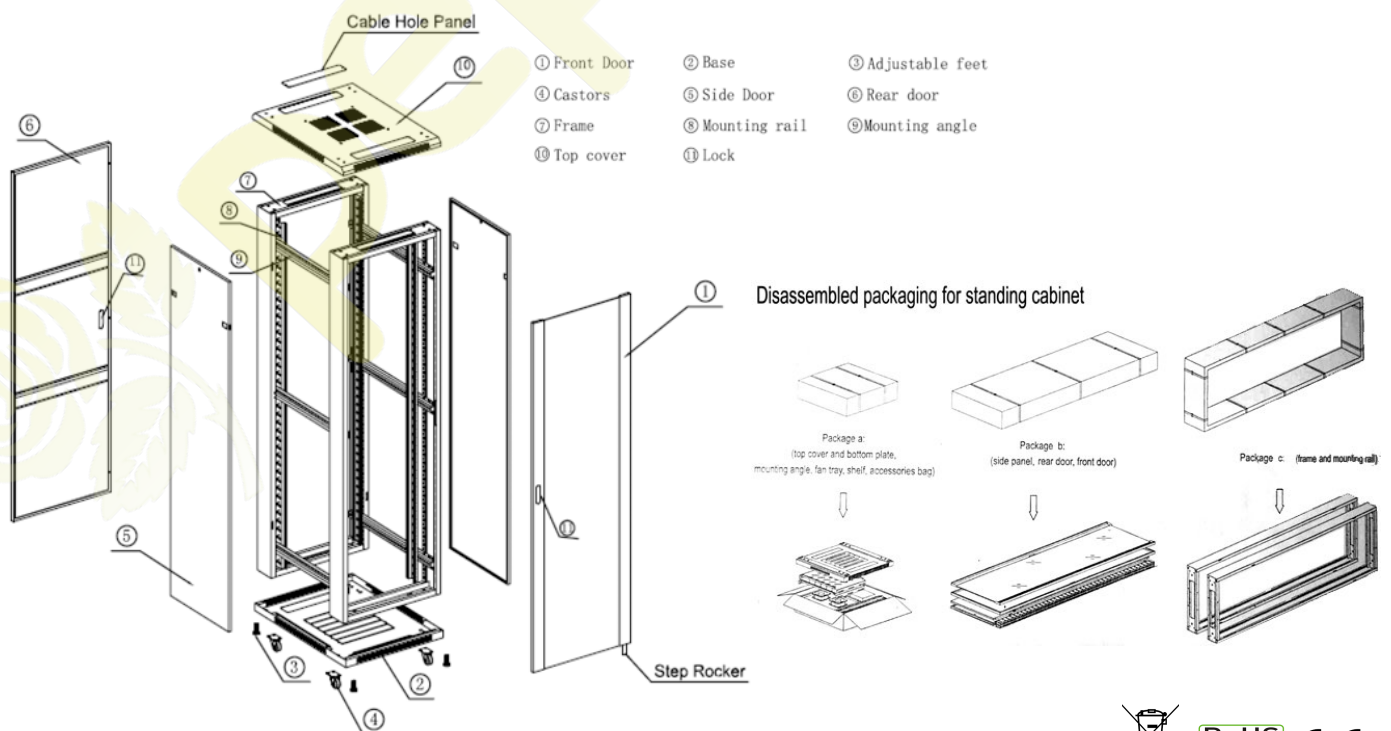

Datos técnicos

No.	Specification	Qty.	Unit	Material	Surface Finish	Remark
1	Top Cover	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm depth for 1.0mm, above is 1.2mm
2	Bottom panel	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm depth for 1.0mm, above is 1.2mm
3	Mounting Profile	4	PCS	SPCC Cold rolled steel 1.5 or 1.8	Powder coated	
4	Mounting angle	6	PCS	SPCC Cold rolled steel 1.5	Powder coated	4pcs of lower 32U
5	Toughened glass or mesh front door	1	PCS	SPCC 1.5/Toughened glass 5.0	Powder coated	High Density vented door/ sheet steel door/ double section high density vented door optional
6	Frame	2	PCS	SPCC Cold rolled steel 1.2	Powder coated	/
7	Fan unit	1	PCS	SPCC Cold rolled steel 1.0	Powder coated	/
8	Fan	2	PCS	120*120*38mm	/	4pcs for over 600 width and 600 depth
9	Side panel	2	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm or 800mm depth for 1.0mm, above is 1.2mm
10	rear door	1	PCS	SPCC Cold rolled steel 1.0 or 1.2	Powder coated	600mm or 800mm width for 1.0mm, above is 1.2mm
11	Spring lock	1	PCS	/	/	with 2keys
12	Small round lock	1	PCS	/	Nickel coated	with 2keys
13	M6 Screw and Square Nuts	20	SET	steel	Zinc coated	40sets for over 32U
14	Adjustable feet	4	PCS	steel	Zinc coated	/
15	Wheels	4	PCS	/	/	/

Standard

Comply with ANSI/EIARS-310-D, DIN41491, PART1, IEC297-2, DIN41494, PART7, GB.T3047.2-92
Standard. Compatible with metric ETSI and 19 inch international standard

Features

Material: Cold Rolled Steel
Modern stylish appearance and elegant exterior
19" standard assembly width
Detachable Composite Structure
Vertical cabinet can move backwards and forwards and adjust up and down to mount instrument
Fan heat dissipation device
Equipped with castor and adjustment feet
Degrease, acid picking, rust prevention and parkerizing pure water cleaning, static electricity plastic for the surface
High strength toughened glass or perforated front door
Maximum Static Loading Capacity: 800KGS (With adjustable feet)
Color: Black

Accessories

Screw and Nut (serial), 4pcs castor and adjustment feet (serial) fixed shelves (optional) 2 fans for 600x600MM for cabinets (optional)
4 fans for 600x800/900/1000MM for cabinets (optional). Sliding shelf (optional). 19" PDU (optional). Others according requirements.

Packing Method

Flat package: The cabinet is disassembled and packed into 3 export cartons (see bottom image).

Referencia	Código EAN	Uds. caja	Dimensiones	Peso
RAC-22660-DST	8436539915324	1	22U (60 x 60 x 104 cm)	30 kg
RAC-22680-DST	8436539913962	1	22U (80 x 60 x 104 cm)	35 kg
RAC-22610-DST	8436539911081	1	22U (100 x 60 x 104 cm)	40 kg
RAC-32660-DST	8436539918165	1	32U (60 x 60 x 161 cm)	50 kg
RAC-32680-DST	8436539910466	1	32U (80 x 60 x 161 cm)	55 kg
RAC-32610-DST	8436539910947	1	32U (100 x 60 x 161 cm)	60 kg
RAC-32880-DST	8436539919858	1	32U (80 x 80 x 161 cm)	60 kg
RAC-42660-DST	8436539915539	1	42U (60 x 60 x 198 cm)	90 kg
RAC-42680-DST	8436539911098	1	42U (80 x 60 x 198 cm)	95 kg
RAC-42610-DST	8436539910930	1	42U (100 x 60 x 198 cm)	100 kg
RAC-42880-DST	8436539918172	1	42U (80 x 80 x 198 cm)	105 kg
RAC-42810-DST	8436539914389	1	42U (100 x 80 x 198 cm)	110 kg



Made in China.



Las especificaciones e imágenes están sujetas a cambios sin previo aviso.
Los nombres referidos y las marcas registradas son pertenecen a sus propietarios.